

epcatalogs.com

JX95 HC Tractor

Operator's Manual Supplement

84134834

CASE *III*

HIGH CLEARANCE TRACTOR

JX95 HC


SPECIFICATION AND DATA

The specifications on the following pages are given for your information and guidance. For further information concerning the tractor, please consult your authorized dealer.

epcatalogs.com

DIMENSIONS OF 2WD MODELS WITH STANDARD TIRES

Tire Combinations	JX95 HC
FRONT	7.50-18
REAR	13.6/12-R38

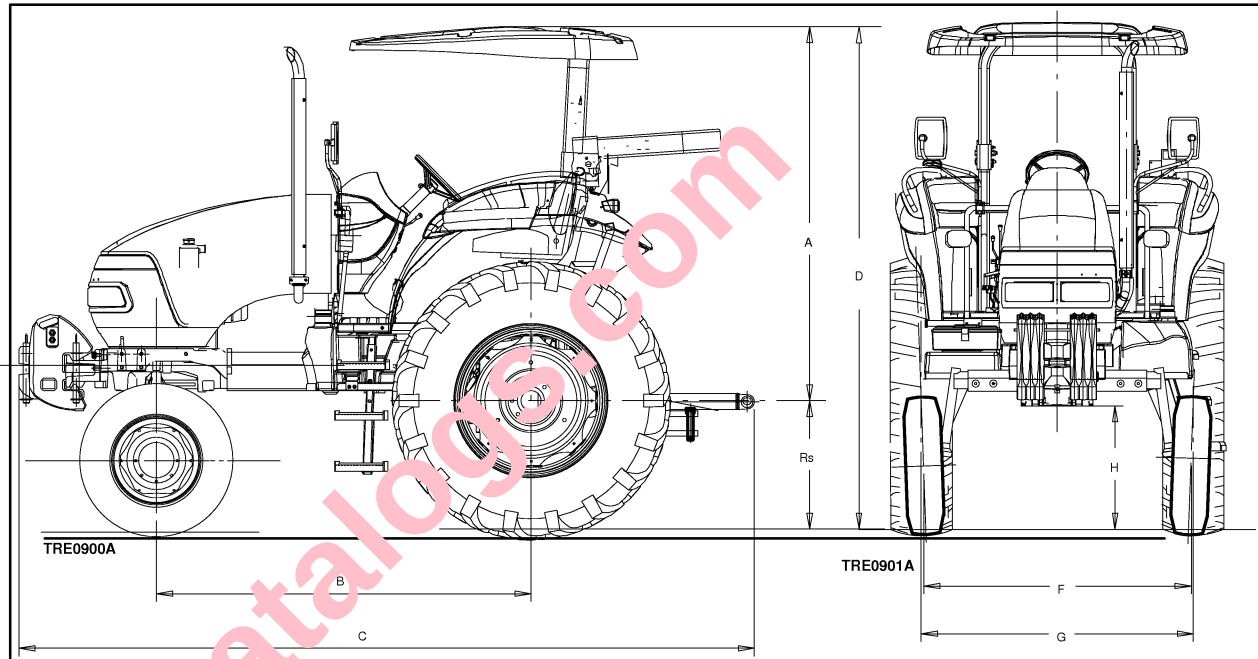


1

Dimensions mm (in)		JX95 HC
Tire radius under load (Rs)		740 (29.13)
A	ROPS	2150 (84.65)
B		2168 (85.35)
C		4172 (164.25)
D (ROPS)		$A_{rops} + R_s$
F (front)		1524-2032 (60-80)
G (rear)		1503-2021 (59.17-79.57)
H		695 (27.36)

DIMENSIONS OF 4WD MODELS WITH STANDARD TIRES

Tire Combinations	JX95 HC
FRONT	13.6/12-R38
REAR	13.6/12-R38

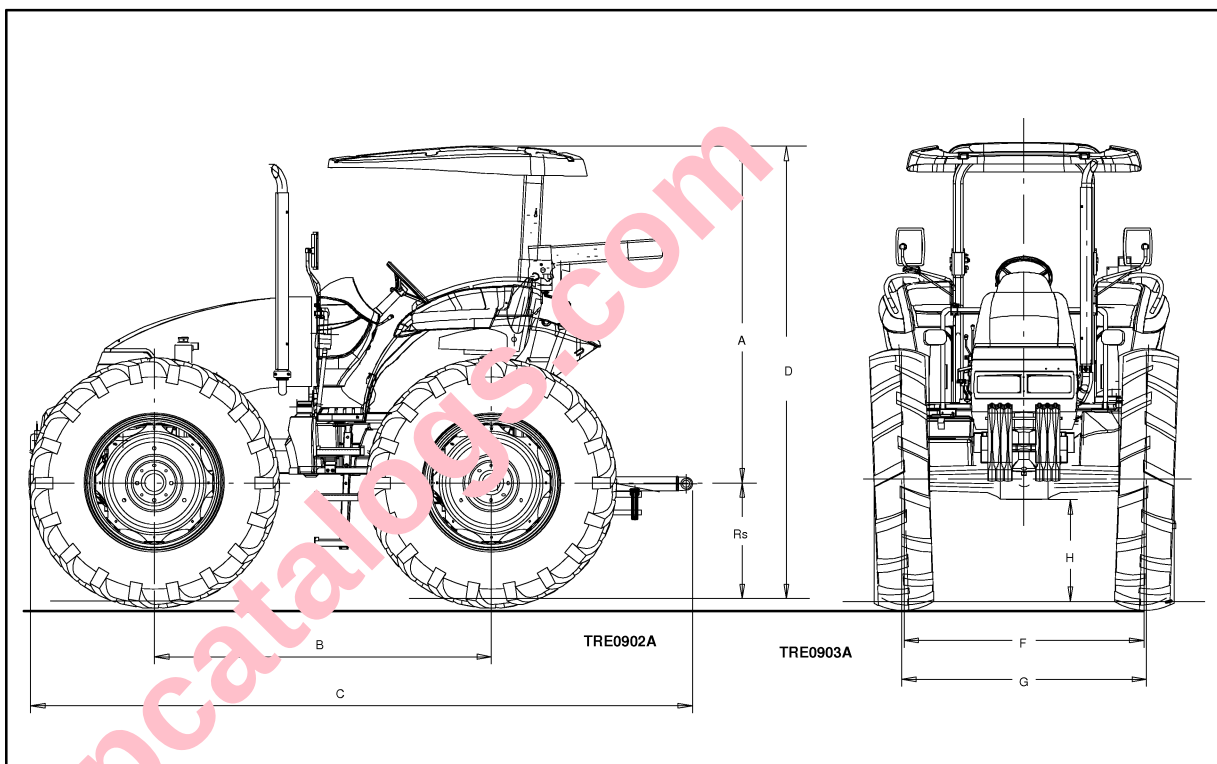

2

Dimensions mm (in)		JX95 HC
Tire radius under load (Rs)		740 (29.13)
A	ROPS	2150 (84.65)
B		2112 (83.15)
C		4182 (164.25)
D (ROPS)		$A_{rops} + R_s$
F (front)		1540–2054 (60.63–80.87)
G (rear)		1503–2021 (59.17–79.57)
H		695 (27.36)

TRACTOR NOISE LEVEL INFORMATION SHEET**TRACTORS WITH ROLL BARS 2/4WD**

Model	Maximum noise level at driver's ear dB (A)	
	30 km/h (19 mph) 2WD	30 km/h (19 mph) 4WD
JX95 HC	86	88

WARNING – If the noise level during continuous use reaches or exceeds **85 dB (A)**, the user must take suitable precautions.

[Buy now](#)

[Case JX95HC Tractor PDF Operator's Manual](#)

[With Instant Download](#)